

# pewag levo hook LH5

**Innovative. Reliable. Radio-controlled.**

## Basis configuration

- pewag levo hook 5to with remote control
- Equipped with temperature sensor
- Charging station
- peTAG (for clear product identification) and operating manual

## Optional equipment

- **Magnetic module with sensor** (for automatic load pickup)
- **Lighting module** (the working area is fully illuminated – making the application safer)
- **levo manager** (the software is a comprehensive configuration and analysis tool for the levo hook; **data logger, weighing module**)
- **Multiloading adapter** (to operate up to 10 charging stations in one line)




## Technical data LH5

- Up to 8,000 operating cycles without a break
- Safety factor against break 4:1
- Protection class: IP65
- Accidental opening of the hook under load is not possible!
- Hook opens and closes within 2.5 seconds

CE FC IC

LH5	Load capacity [kg]	e [mm]	a [mm]	b1 [mm]	b2 [mm]	d1 [mm]	d2 [mm]	g [mm]	h [mm]	h1 [mm]	w [mm]	Weight [kg/pc.]
	5,000	460	32	156	220	54	61	29	528	46	142	20

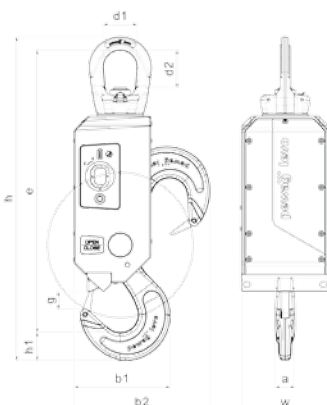

Find more information:



levo.pewag.com